

SPV[®]

PORTABLE HOLIDAY DETECTORS

MODELS
715
725
735
915
925



**Accurate, Reliable
Inspection Of
Any Coating,
Onshore or Offshore**



- **Precisely the Right Voltage**
- **Output Voltage Automatically Regulated**
- **State-of-the-Art Electronic Circuitry**
- **Slide-On Battery**
- **Horn and Light for Holiday Indication**

SPY[®]

PORTABLE HOLIDAY DETECTORS

MODELS
715
725
735
915
925


Pipeline Inspection Company, Ltd. offers five new "SPY[®]" model Holiday Detectors that combine the field proven cases, probes and electrode configuration with latest technology in solid-state circuitry that is simplified and more efficient.

Infinite Voltage Settings now allow you to set the voltage exactly to the level you desire for the coating you are inspecting. Not 6 settings, not 20 ... any setting you desire over the complete range of each detector model. Whatever the pipe size, 2 inches through 60 inches, whatever the coating - mastic, tar, asphalt, extruded coats and tapes or thin film epoxy coatings - you have at your control the exact voltage setting required.

Automatically Regulated Voltage keeps your voltage constant! Over a range of 2 in. through 60 in. pipe the detector output voltage automatically adjusts under the working load to the voltage levels you set. Now you can forget compensations for pipe size, coating variations, or moisture on the pipe - the detectors automatically make these adjustments.

Interchangeable batteries slip easily into position with a snap that announces positive contact, and a secure lock in position. Two batteries and a universal charger are part of the package. For continuous service, one battery is kept charging while the other powers the unit. More efficient circuitry means reduced current drain and prolonged battery life.

MODELS 715 725 735

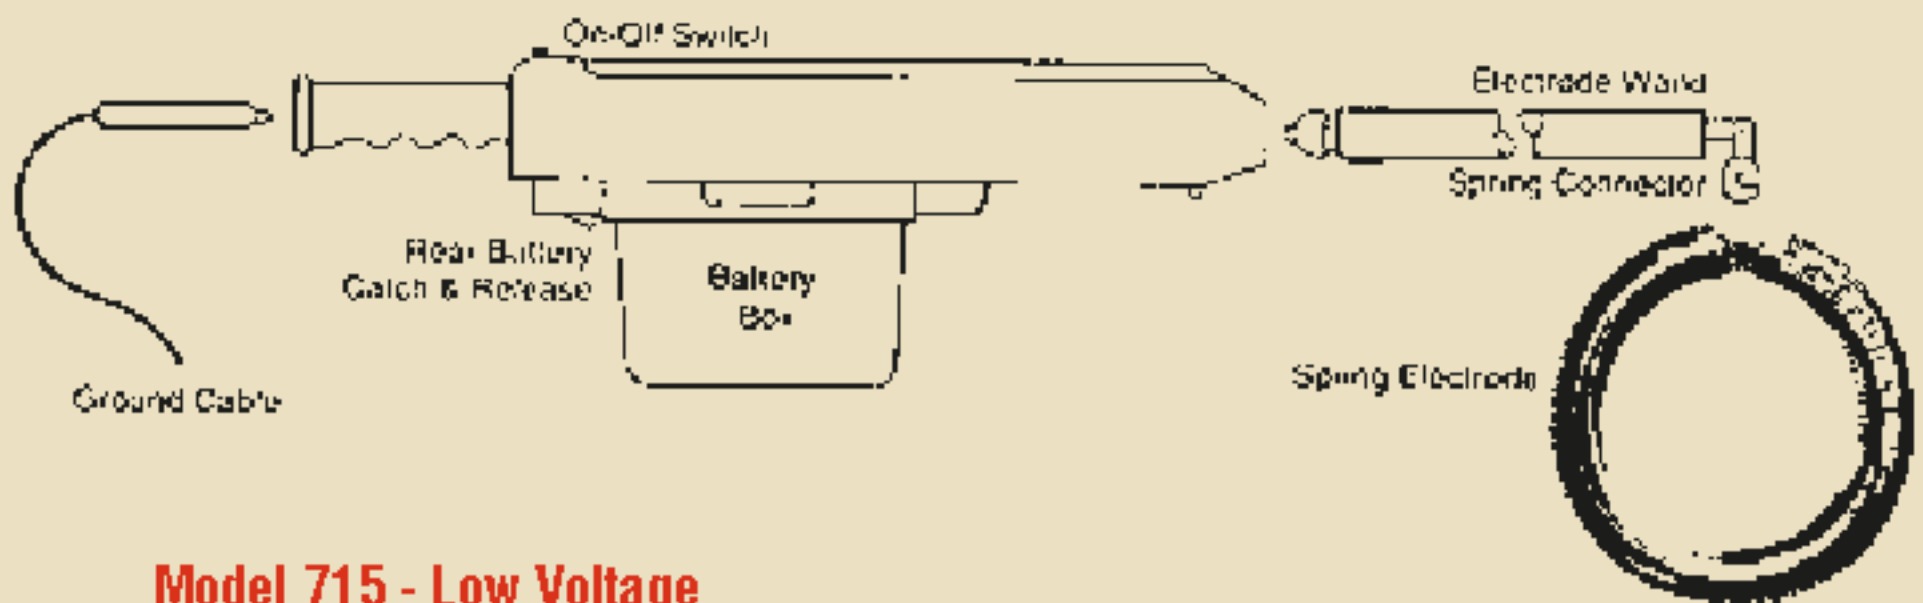

Model 715 - Low Voltage

The 715 is designed especially for thin film coatings. It provides infinite voltage settings over the 1,000 to 5,000 volt range. If moisture on the pipe, the Model 715 automatically converts from DC to a fast pulse mode. This enables you to inspect under wet or dry conditions.

Model 725 - High Voltage


For thicker coatings such as coal tars, extruded and tape coatings, the Model 725 has a range of infinite voltage settings from 1,000 to 15,000 volts. This wide range permits you to maintain a steady inspection rate on most types of coatings.



Model 735 - Extra High Voltage

This spy detector has a range of 15,000 to 35,000 volts for inspections of mastic and other extra thick coatings. Pulse voltage only.

MODELS 915 925 SHOULDER TYPE

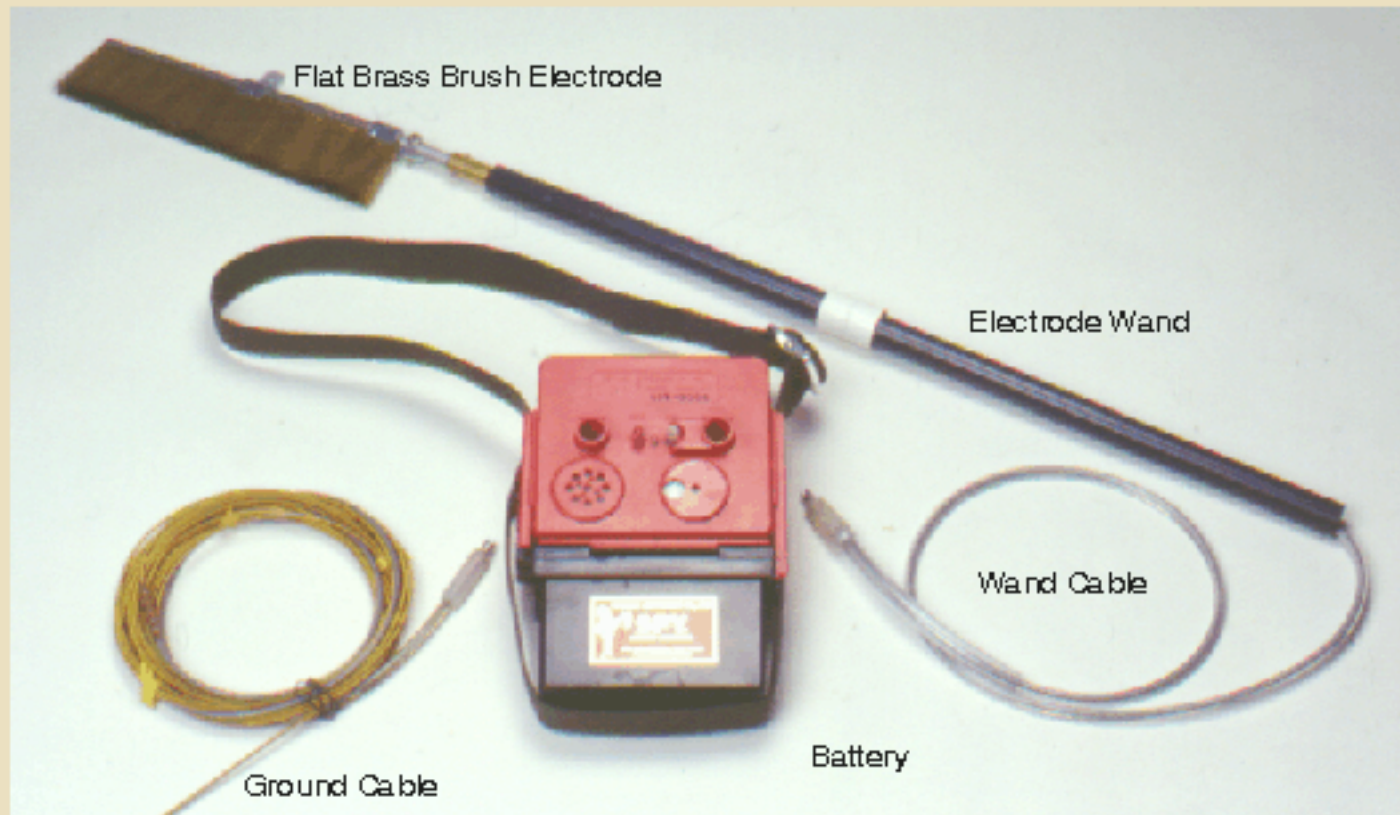

These Holiday Detectors incorporate the features and capabilities of the Model 715 and Model 725 detectors. Shoulder models with flat brass electrodes are specially suited for "spark testing" coatings on tanks and flat surfaces.

SPECIFICATIONS

Detector: Latest semiconductor circuitry in a molded high-impact, shockproof ABS and nylon plastic case. Push button "on-off" switch is recessed to prevent accidental dental activation. Light in the switch gives on/off indication, and blinks to visually signal holidays, in addition to the loud, high-pitched signal horn that is easily heard above job site noises.

Battery: 3 1/2 lb., 6-volt rechargeable lead dioxide battery gives a day's operation under normal conditions. 8 amp-hour rating. No fluid required! Operates in any position.

Charger: Fully transistorized. Recharges battery in about 8 hours. No overcharging – brings battery to full charge then supplies a trickle to maintain peak charge. Universal charger – 120/240 volt. Doubles as battery tester.

Electrode Wand: Rugged ABS plastic over stainless steel core and solid aluminum rod. Easily assembled spring connector. For Models 715, 725, 735, standard length wand is 21 inches. Extra length available. For shoulder Models 915, 925, the standard two-piece sturdy

plastic tube wand joins for a 30 inch reach. Other lengths are available.




Ground Cable: Flexible cable lies flat, gives optimum grounding action. Interlock assures positive electrical connection. Standard length 50 feet.

Electrode Connector: For spring electrodes the connector has a sealed ball bearing in the end to permit the electrode to roll freely. Simple wing nut connection for brush and other type electrodes.

Carrying/Shipping Case: Molded ABS plastic construction. Ties assure secure weather-proof protection for detector and components. Parts are cushioned in a molded insert. Full-length piano-type hinge, rugged catches.

Weights: Average domestic shipping weight (dependent on electrode size): 35 lbs. Export air shipping weight: about 50 lbs.

ELECTRODE TYPES

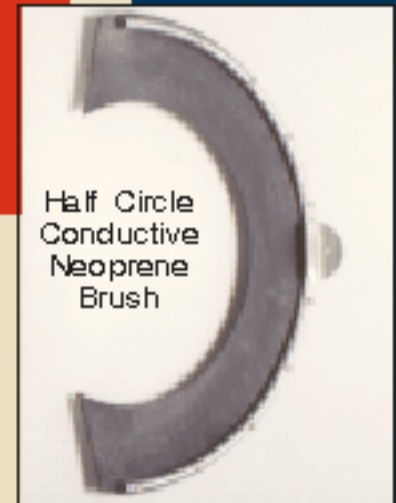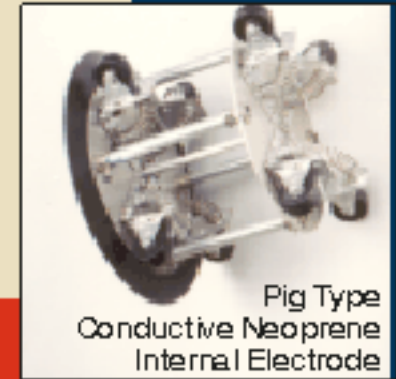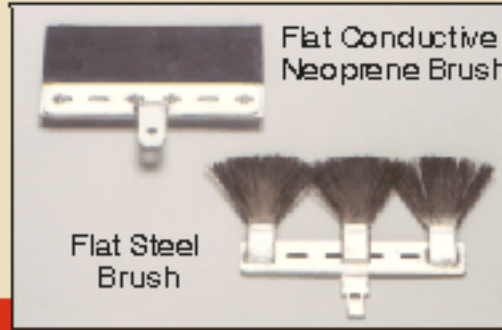

OTHER DETECTORS

Worldwide Availability

Pipeline Inspection Company has a worldwide distributor network to ensure that detectors are available where and when needed.

PIPELINE INSPECTION COMPANY, LTD.

P.O. Box 55648 • Houston, Texas 77255-5648

1919 Antoine • Houston, Texas 77055

PH: (713) 681-5837 • FAX: (713) 681-4838

See our complete product line on the Internet at www.picld.com